

Wheels and Rollers

for Kone and general use

Wheels for Kone

Part Number	Kone Part Number	Description
MW-7	MAP341	Roller, hatch door roller, 73.0 mm
MW-8	MAP344, P31344	Roller, car door roller, 93.7 mm
MW-8E		Roller, car door roller, 93.7 mm, as above but with eccentric shaft

Generic replacement roller guides

Part Number	Description
URG-001	Universal Roller Guide , replacement for ELSCO Model D, for low-speed elevators and moderate-speed counterweights, with three 82.6 mm wheels, for capacities of up to 909 kg passenger cabs, 909 kg freight cabs and 1818 kg counterweights and speeds of up to 1.27 m/sec for cabs and 4.07 m/sec for counterweights.
URG-002	Universal Roller Guide , replacement for ELSCO Model B, for moderate-speed elevators and high-speed counterweights, with three 152.4 mm wheels, for capacities of up to 2045 kg passenger cabs, 2727 kg freight cabs and 3636 kg counterweights and speeds of up to 3.56 m/sec for cabs and 7.11 m/sec for counterweights
URG-005	Universal Roller Guide , replacement for ELSCO Model A, for high-speed elevators, with six 152.4 mm wheels, for capacities of up to 3636 kg passenger cabs and 5454 kg freight cabs and speeds of up to 7.62 m/sec for cabs
URG-006	Universal Roller Guide , replacement for ELSCO Model C, for low-speed elevators and moderate-speed counterweights, with six 82.6 mm wheels, for capacities of up to 1136 kg passenger cabs and 3636 kg counterweights and speeds of up to 2.03 m/sec for cabs and 4.07 m/sec ft/min for counterweights

MW-7



MW-8



MW-8E



URG-001



URG-002



URG-005



URG-006




Wheels and Rollers

for Otis

Door and hanger rollers

Part Number	Otis Part Number	Description
OW-1	456DH1	Door hanger roller, 85.7 mm O.D. x 20.6 mm polyurethane tyre with eccentric, 12.7 mm NF threaded shaft
OW-2	456W1	Door hanger roller, 82.6 mm O.D. x 17.5 mm, with 25 mm I.D., polyurethane tyre
OW-11		Door hanger roller, 82.6 mm O.D. x 17.5 mm, 12.7 mm I.D., aluminum with polyurethane tyre
OW-11S	A456W1	Door hanger roller, 82.6 mm O.D. x 17.5 mm, 12.7 mm I.D., steel roller with polyurethane tyre
OW-12	456CX4	Door hanger roller, 85.7 mm O.D. x 20.6 mm, 20 mm I.D., with 8.7 mm radius on concave polyurethane tyre surface
OW-12B		Eccentric shaft, for OW-12 door roller, 1/2" NF threaded
OW-12A		Door hanger roller, 85.7 mm O.D. x 20.6 mm, 20 mm I.D., all-steel construction for flat track
OW-12C		Door hanger roller, 85.7 mm O.D. x 20.6 mm, 20 mm I.D., aluminum with polyurethane tyre for flat track
OW-12S		Door hanger roller, 85.7 mm O.D. x 20.6 mm, 20 mm I.D., steel with polyurethane tyre for flat track
OW-23	389J2	Hanger assembly, for Type B & 7087
OW-13	456CC1	Steel door roller, 69.9 mm O.D. x 19.1 mm, 20 mm I.D. (for OW-23)
OW-13A	456CC1	Door roller, as above but with polyurethane tyre (for OW-23)
OW-13B		Eccentric shaft, for OW-13 roller
OW-18	A456EA1	Steel hanger roller, for 6178A assembly, 82.6 mm O.D. x 17.5 mm, 12.7 mm I.D.,
OW-18A	A456EA1	Hanger roller, 17.5 mm wide, for 6178A assembly steel with polyurethane tyre

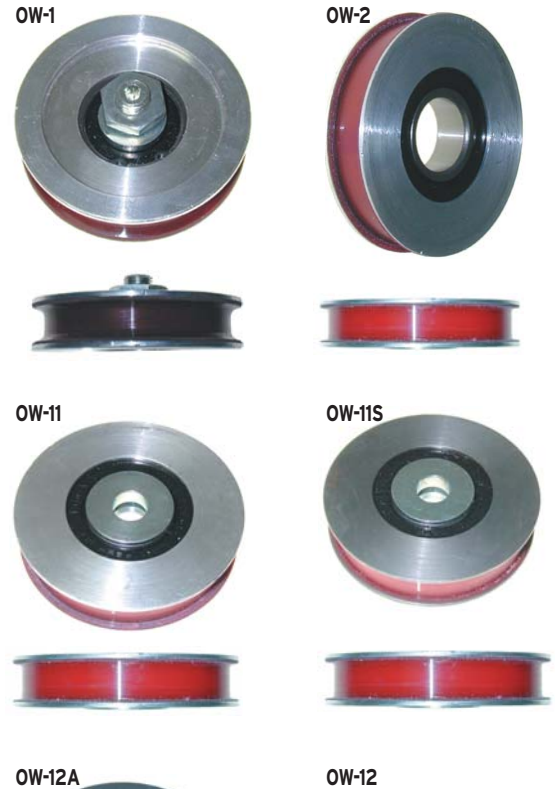

Upthrust rollers

Part Number	Otis Part Number	Description	Spacing (S)
ODO-13	456CP1	34.9 mm dia. x 12.7 mm	12.7 mm
ODO-14	456CP2	34.9 mm dia. x 12.7 mm	6.4 mm
ODO-15	207Z4	34.9 mm dia. x 11.1 mm	3.2 mm
ODO-15A	456Z1	19.1 mm dia. x 11.1 mm	6.4 mm



Wheels and Rollers

for Otis

Door, roller guide and tachometer wheels

Part Number	Otis Part Number	Description
OW-3	456AK2	Roller guide wheel, 95 mm O.D., polyurethane tyre, sealed maintenance-free bearing with 15.9 mm shaft
OW-3A	A59J1	Pivot bolt, for pivot arm
OW-4	456DN1	Roller guide wheel, 76.2 mm O.D., 9.5 mm flat polyurethane tyre face, with 12.7 mm NC threaded eccentric shaft, 25.4 mm L
OW-4A	456DN2	Roller guide wheel, shaft 44.5 mm L
OW-4B	456DN3	Roller guide wheel, shaft 60.3 mm L
OW-19	B6037B6, B6037B1	Hanger assembly, for hoistway, includes heavy bracket, rollers and wiper
OW-19A	456G1, 456EP2	Door roller kit, bolt and washer, replacement roller kit for OW-19, 57.2 mm O.D., 19.1 mm I.D.
OW-17	456CE4	Door roller with eccentric shaft, 50.8 mm O.D. x 14.3 mm with threaded shaft 1/2-20
OW-20	456FC1	Hanger roller, LRV, 50.8 mm O.D.
OW-21	A6037D1	Wheel, 76.2 mm O.D., 22.2 mm W, 19.1 mm tyre surface, 12.7 mm I.D., aluminum
OW-24	HT200983-1	Tachometer drive wheel, velocity transducer wheel for geared and gearless equipment, 110 mm O.D. x 12.4 mm tapered I.D.

OW-3



OW-3A



OW-4



OW-19A



OW-17



OW-20



OW-19



OW-24



OW-21



Wheels and Rollers

for Otis

Roller guide wheels and components

Part Number	Otis Part Number	Description
OW-7	456CL4	Roller guide wheel, 187.3 mm O.D. x 38.1 mm, polyurethane tyre with sealed maintenance-free bearing with threaded shaft, hub extends past tyre width on shaft side, after Dec. '62
OW-15	456AJ2	Roller guide wheel, 187.3 mm O.D. x 38.1 mm, polyurethane tyre with sealed maintenance-free bearing with shaft, hub extends past tyre width on side opposite shaft, 1941 thru 1962
OW-7A	59P2	Pivot bolt, for 187.3 mm roller guide assembly
OW-7B	335H1	Brass bushing, for roller guide assembly
OW-7C	B288CK1	Lever, for 187.3 mm roller guide assembly, R.H.
OW-7D	B288CK2	Lever, for 187.3 mm roller guide assembly, L.H.
OW-8	456CM4	Roller guide wheel, 123.8 mm O.D. x 66.7 mm overall hub width, polyurethane tyre, 25.4 mm shaft, maintenance-free sealed pump shaft bearing
OW-9	456CN4	Roller guide wheel, 95.3 mm O.D. x 22.2 mm polyurethane tyre, 15.9 mm hub, 25.4 mm shaft, maintenance-free sealed pump shaft bearing
OW-9A	6261P1	Roller guide assembly, complete, with three OW-9 rollers, 95.3 mm O.D.
OW-9D	A77TNI	Pivot pin, for OW-9A roller guide assembly
OW-9B	288LM2	Arm lever, roller guide assembly, 95.3 mm
OW-9C	288LL2	Post, arm lever for roller guide assy., 95.3 mm
OW-10	456CV4	Roller guide wheel, 254 mm O.D. x 38.1 mm, polyurethane tyre, shaft with maintenance-free sealed bearing
OW-10B	59BR2	Pivot bolt, for roller guide assembly

OW-7



OW-7A



OW-7B



OW-7C



OW-7D



OW-9D



OW-9C



OW-8



OW-9A



OW-9B



OW-10



OW-10B

